MARCUM ENGINEERING, LLC
500 SOUTH 17th STREET - PADUCAH, KENTUCKY 42002-0120
PHONE - 270.444.9274 FAX - 270.443.1904
www.marcumengineering.net
COPYRIGHT ©, 2012 - MARCUM ENGINEERING, LLC

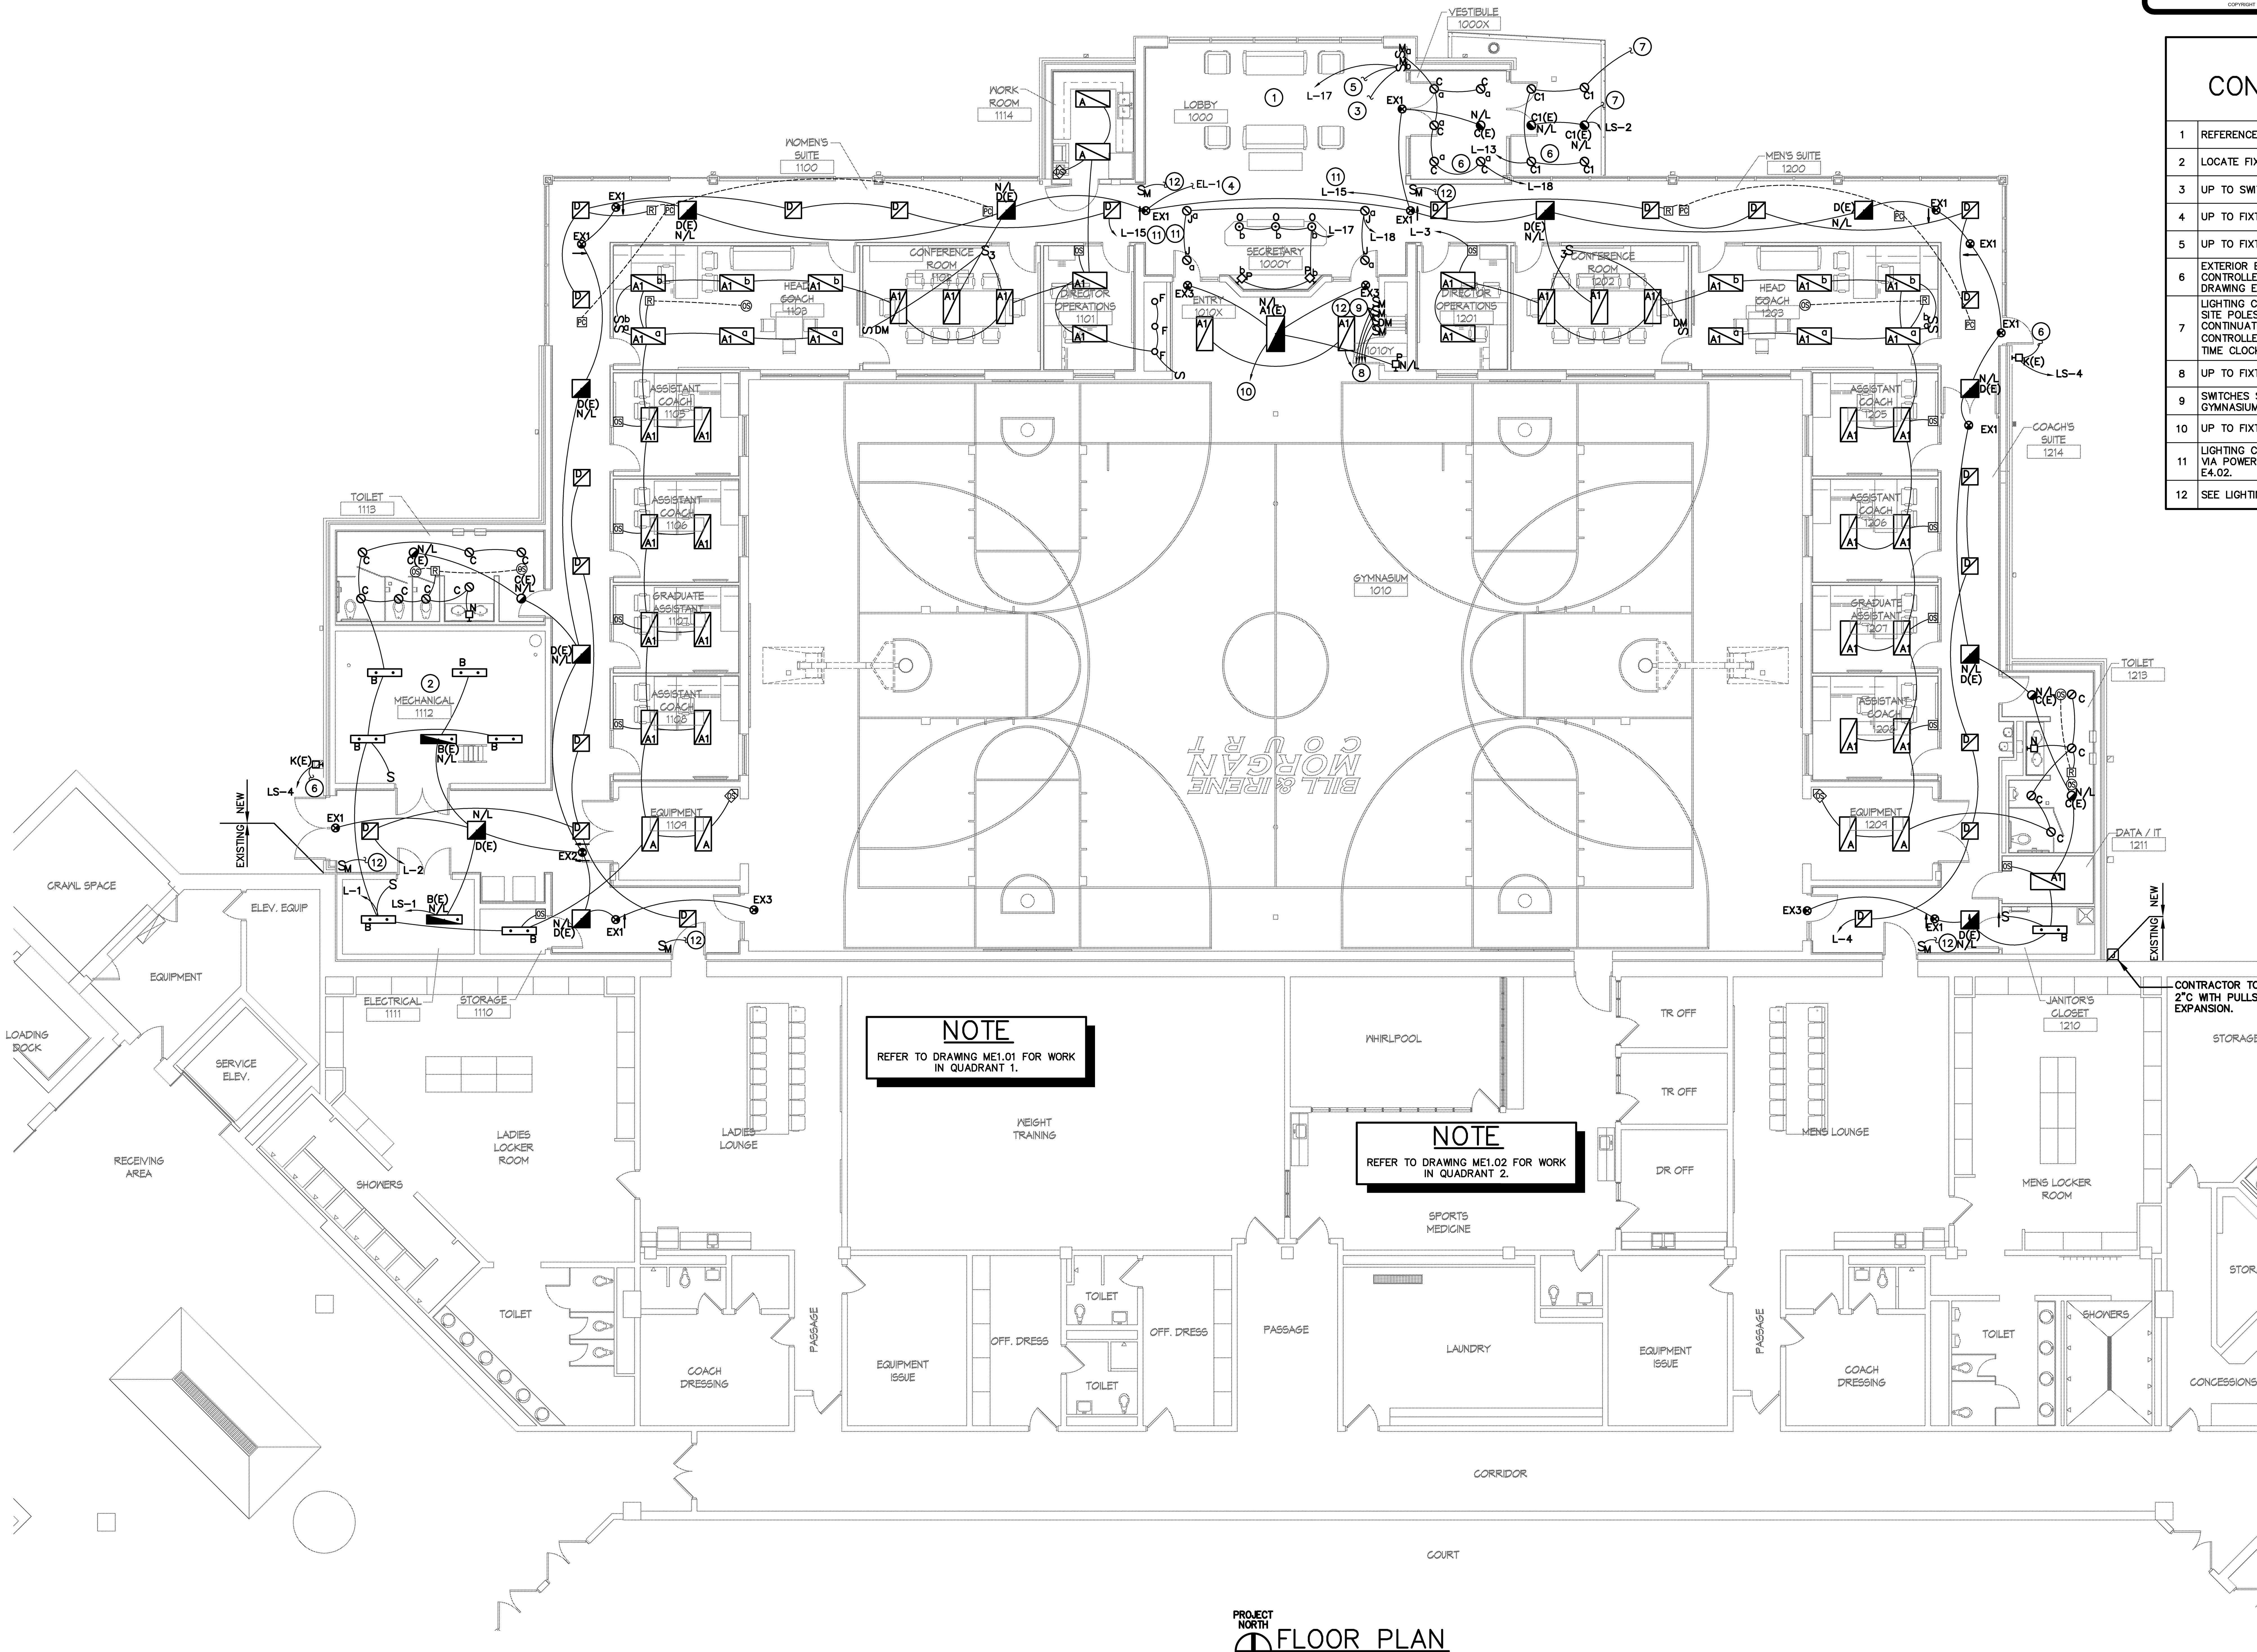

ELECTRICAL CONSTRUCTION NOTES

THIS DRAWING ONLY

1	REFERENCE DRAWING A3.01 FOR RCP AND CEILING HEIGHTS.
2	LOCATE FIXTURE TYPE B AND B(E) 8'-0" A.F.F.
3	UP TO SWITCH "c", CONTINUED ON DRAWING E1.03.
4	UP TO FIXTURE TYPE G(E), CONTINUED ON DRAWING E1.03.
5	UP TO FIXTURE TYPE G, CONTINUED ON DRAWING E1.03.
6	EXTERIOR EMERGENCY EGRESS LIGHTING SHALL SHALL BE CONTROLLED VIA TIME CLOCK AND PHOTOCELL. REFER TO DRAWING E4.02.
7	LIGHTING CIRCUITS SHALL BE ROUTED TO EXTERIOR WALK WAY SITE POLES. REFER TO SITE PLAN DRAWING U1.01 FOR CONTINUATION. EXTERIOR LIGHTING CIRCUIT SHALL BE CONTROLLED VIA SQUARE D POWERLINK BREAKER (OFCI) AND TIME CLOCK (CFCI). SEE DETAIL DRAWING E4.02.
8	UP TO FIXTURE TYPE H, CONTINUED ON DRAWING E1.03.
9	SWITCHES SHALL OPERATE 40%, 40%, 20% (DIMMABLE) AND 100% GYMNASIUM LIGHTS RESPECTIVELY.
10	UP TO FIXTURE TYPE M, CONTINUED ON DRAWING E1.03.
11	LIGHTING CIRCUIT L-15 SHALL BE CIRCUIT BREAKER CONTROLLED VIA POWERLINK BREAKER AND PHOTOCELL. SEE DETAIL DRAWING E4.02.
12	SEE LIGHTING CONTROL DIAGRAM ON DRAWING E4.02.

Hastings+Chivetta
ARCHITECTURE • PLANNING • ENGINEERING
622 Emerson, Suite 200 | Saint Louis, Missouri 63141 | Tel.314.863.5717 | Fax.314.863.2823 | www.hastingschivetta.com
CIVIL: BACON, FARMER, WORKMAN ENGINEERING & TESTING, INC., 1215 DIUGUID DRIVE, MURRAY, KENTUCKY 42071
STRUCTURAL: BACON, FARMER, WORKMAN ENGINEERING & TESTING, INC., 403 N. COURT ST., MARION, ILLINOIS 62959
MPE: MARCUM ENGINEERING, LLC, 500 SOUTH 17TH STREET, PADUCAH, KENTUCKY, 42002
© Copyright 2012 Hastings+Chivetta Architects, Inc. Any reproduction or unauthorized use of this document or any part of this document without the express written consent of Hastings+Chivetta Architects, Inc. is prohibited.

MURRAY STATE UNIVERSITY
FACILITIES DESIGN AND CONSTRUCTION
DEPARTMENT FOR FACILITIES MANAGEMENT
MURRAY, KY 42071-3354
DATE 01/06/12

SPORTS PRACTICE FACILITY
MURRAY STATE UNIVERSITY
MURRAY, KENTUCKY
BID SET - 2012-01-04

REVISIONS

KEY PLAN

Date -	2012-01-04
H+C Project No -	2983.00
FDC Project No -	10-007
BFW Project No -	11194
Marcum Project No -	11557
Sheet Name -	ELECTRICAL LIGHTING PLAN

E1.01